

Rest assured

YOU INSTALLED A SECURITY FIREPLACE



*The simple elegance of a traditional wood-burning fireplace.
The serene comfort of a crackling fire.
Warmth that soothes your senses and radiates throughout your home.
That's the beauty of Tradition.*

Security Chimneys International has kept the home fires burning for over 20 years by developing innovative hearth products that lead the market in style, performance and reliability. This tradition of innovation means that homeowners across North America can benefit from a complete line of high quality venting products and EPA approved zero clearance wood-burning fireplaces.

With a reputation for total quality that goes back generations, Security Chimneys International is well on the way to becoming the premier, most trusted supplier of quality chimneys and selected fireplaces in North America.






(EPA stands for the Environmental Protection Agency)



SECURITY CHIMNEYS INTERNATIONAL




ENGINEERED TO BE THE BEST

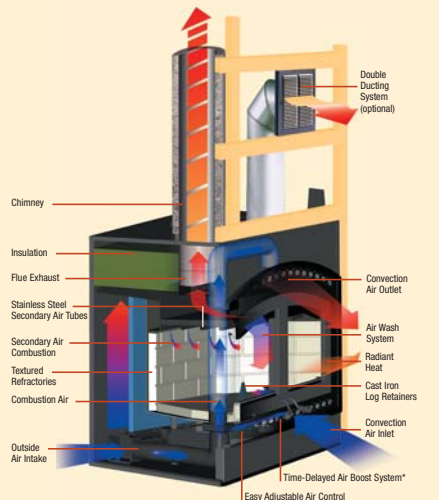





Thanks to a versatile VENTING SYSTEM, the BIS TRADITION and the BIS TRADITION CE can be connected in a variety of venting configurations. In fact, they can be set up in any area of your home, whether upstairs, downstairs or both. And, once installed, their maintenance-free construction means you never have to worry about them again.

*Exclusive Time-Delayed Air Boost System provides additional air input at ignition before dropping back to the desired burn rate you have set. †BIS Tradition only. Air-cooled chimney not recommended for use at elevations above 4,000 feet or in climates where temperatures will fall below 32° Fahrenheit (0° Celsius).

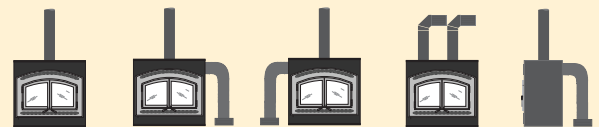

No ducting
Forced air on right side**
Forced air on left side**
Two gravity vent kits
Forced air on the back**

**Canada only



IMPORTANT NOTES:
As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using the appliance. For further information, consult your dealer.
Actual performance may vary depending upon home design and insulation, ceiling heights, climate, condition and type of wood used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.
Diagrams, illustrations and photographs are not to scale - consult installation instructions. Product designs, materials, dimensions, specifications, colours and prices are subject to change or discontinuance without notice.

Authorized Dealer



Printed in Canada
ASCTRA-C-1
08-2007
REV 3

© Lennox Industries Inc. 2007

SECURITY CHIMNEYS INTERNATIONAL

Rest assured

A SECURITY CHIMNEY FIREPLACE IS SECOND TO NONE



HIGH-EFFICIENCY EPA APPROVED WOOD-BURNING FIREPLACES



SECURITY CHIMNEYS INTERNATIONAL

BIS

TRADITION AND TRADITION CE



BIS

Tradition



Mix & Match Design Options
With 4 optional facades and doors
you can make your fireplace design uniquely your own.

BIS

Tradition



HAMMERED STEEL AVAILABLE FOR TRADITION & TRADITION CE (DOORS AND TRIM ONLY)

Tradition

This impressive model is one of the biggest, most beautiful EPA approved zero clearance wood-burning fireplaces on the market today. Leading-edge features such as non-catalytic combustion make the BIS Tradition virtually maintenance-free while its Time-Delayed Air Boost system provides the added appeal of care-free ignition. The advanced engineering of the BIS Tradition, combined with its large, unobstructed view and up to 8 hours of burn time, means homeowners will spend more time enjoying the fire than taking care of it. Plus, its heat-activated blower is cleverly hidden in its graceful design, providing energy efficient heat distribution without sacrificing the natural aesthetics of a traditional masonry hearth.

Tradition CE

The BIS Tradition CE is the latest addition to the BIS family of EPA approved zero clearance wood-burning fireplaces. This Compact Edition has all the key performance features of the BIS Tradition, such as ceramic glass for added safety and optimum heat transfer and an airtight combustion chamber for maximum efficiency, but its compact size makes it ideal for smaller spaces. What's more, its single door design gives homeowners the ultimate view of the fire. An array of optional facades and doors is also available, which means you can customize the BIS Tradition CE to suit the decor of any home.



The design of the BIS TRADITION is an inspirational balance of form and function.

1. Refractories capture the authentic look of a real masonry firebox
2. Arch design facade and door give the fireplace a traditional look
3. Decorative log retainer

STANDARD FEATURES

- Impressive size: 47" W x 45" H x 28" D (refer to burn rate chart)
- Burn time up to 8 hrs., depending on the wood used
- Chimney Systems (7") - Secure Temp S-2100[®] - Air Cooled - Secure Temp GX[™] ***
- Masonry installation with TUBINOX rigid stainless steel liner (optional)
- EPA approved, 7.4 gr/hr
- Warnock Hersey approved to UL-C-5610 and UL-127 standards
- Choice of 4 optional facades and doors: Black, Brushed Nickel, 24 Karat Gold Plated or Hammered Steel
- Heat activated blower
- Energy efficiency through natural convection

SPECIFICATIONS

- Up to 63% efficiency
- Up to 80,000 Btu cordwood heat output


OPTIONS

- Heating capacity up to 2,500 sq. ft.** (refer to burn rate chart)
- Non-catalytic combustion for maintenance-free operation
- Zero clearance wood-burning fireplace
- 4.0 cu. ft. firebox with 30" log capacity
- Time-Delayed Air Boost system for care-free ignition
- Multiple heat distribution capability
- Textured refractory-lined firebox recreates a traditional masonry fireplace
- Outside air kit (4" I.D. x 10' long insulated flex and resister)
- Gravity vent kits - Double duct in brass or black
- Forced Air Heating Kit[®] for remote room heating (not EPA approved)
- Rigid firescreen
- Canada only

** Results will vary depending on room design, wood used, fireplace location, burn rate and chimney installation.
*** USA only

Square feet heating capacities are approximations only. Actual performance may vary depending upon home design and insulation, ceiling heights, climate, condition and type of wood used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Burn Rate – Hearth Temperature*

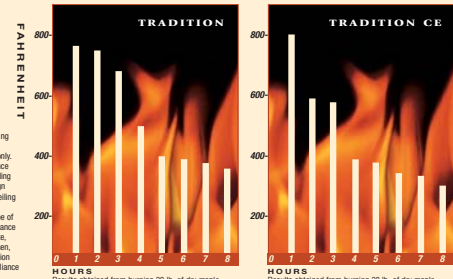

Beautifully match or accent your decor with optional cast iron door finishes in 24 karat Gold Plated, Brushed Nickel or Black.

STANDARD FEATURES

- Convenient size: 36" W x 36" H x 25" D
- Single door for a better view of the fire
- Non-catalytic combustion for maintenance-free operation
- Overall firebox capacity 2.00 cu. ft.
- Outside air kit (4" I.D. x 10' long insulated flex and resister)
- Heat activated blower
- Refractories simulate a real masonry hearth
- Knockout on side and back to connect forced air system
- Ceramic glass for safety & optimum heat transfer
- Efficient air wash system keeps the glass clean
- Airtight combustion chamber for maximum efficiency
- Double Air Combustion Control (all-in-one) - Main control for variable heat output and wood consumption - Air Boost Control for faster wood ignition and efficient combustion
- Choice of Black, Brushed Nickel and 24 Karat Gold Plated Steel facades and Steel or Cast Iron doors (mix and match)

SPECIFICATIONS

- Zero clearance for combustible materials
- Maximum heat efficiency: 72%
- Up to 55,000 Btu/hr
- Can heat between 1,000 to 1,500 sq. ft. (may vary depending on individual characteristics of home) (refer to burn rate chart)
- Burn time 6-8 hours (depends on wood used)
- Maximum log size 20"
- Warnock Hersey approved to UL-C-5610 & UL-127
- EPA approved and Washington State (3.7 gr/hr)
- Chimney 6" I.D. Secure Temp ASHT[™], Air Cooled Chimney & Secure Temp S-2100[®]
- Masonry installation with TUBINOX rigid stainless steel liner (optional)

OPTIONS

- Gravity Kits - Double duct in Brass or Black - Single duct in Brass or Black
- Forced Air Heating Kit for remote room heating (not EPA approved)
- Rigid firescreen